

Quick Tread - Stand Alone

Flush Mounted



Stand-Alone Flush Mount Quick Tread Installation


NOTE: See 6778-T for complete information, including air supply, environmental specifications and UL certifications.

Site Specifications	
Power Requirements	115/230v, 15 amp* 50/60 Hz 1 ph ¹
Air Supply Req. (SI Units)	90-150 PSI (6.2-10.3 bar)
Substructure Specifications	Refer to Form 6905-T
Pedestal Location	36 - 96 in. (914 - 2438 mm) from QT1F
Product Specifications	
Max. Wheel Weight	3500 lb. (1588 kg) per wheel
Test Entry Speed	2 to 8 mph (3-13 km/h)
Shipping Weight	
Quick Check Cabinet	290 lbs (132 kg)
Quick Check Drive Under Sensor	316 lbs (143 kg)
Quick Tread	1723 lbs (455 kg)

* Amperage shown is minimal circuit rating.

¹ Isolated ground recommended.

OVERALL FOOTPRINT

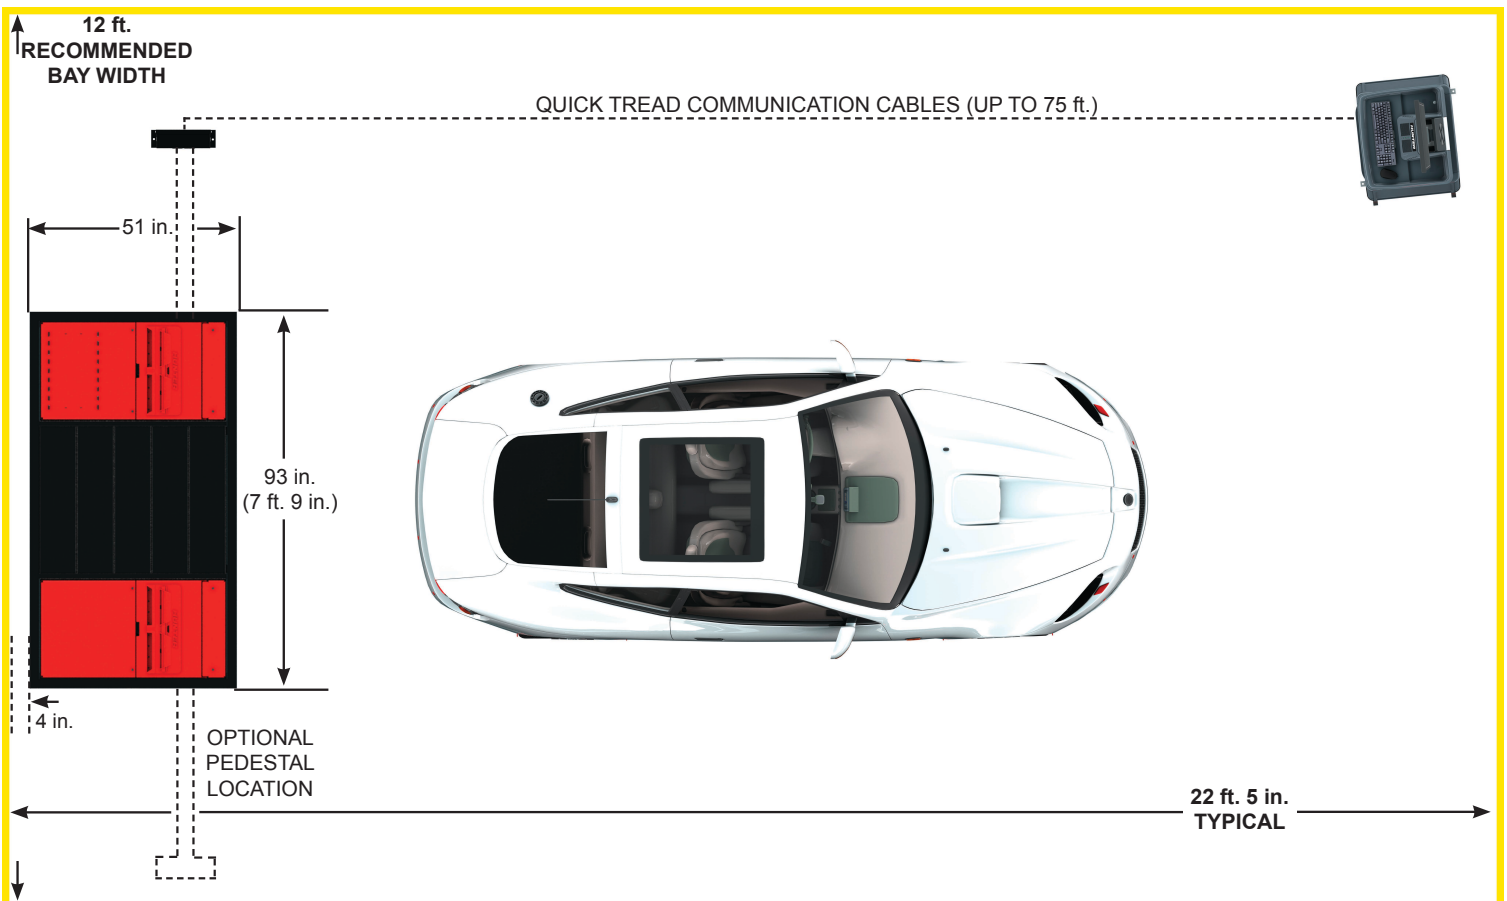

Continued on Page 2

For inspection information visit:
www.hunter.com/inspection

For general inquiries visit:
www.hunter.com
or call
800 448-6848


For local contact visit:
www.hunter.com/company/findrep.cfm

Quick Tread - Stand Alone


Flush Mounted

HUNTER
Engineering Company

QUICK CHECK DIMENSIONS

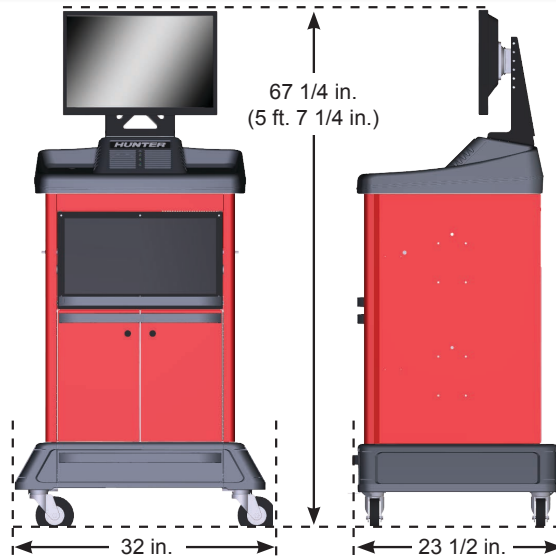

QUICK TREAD DIMENSIONS

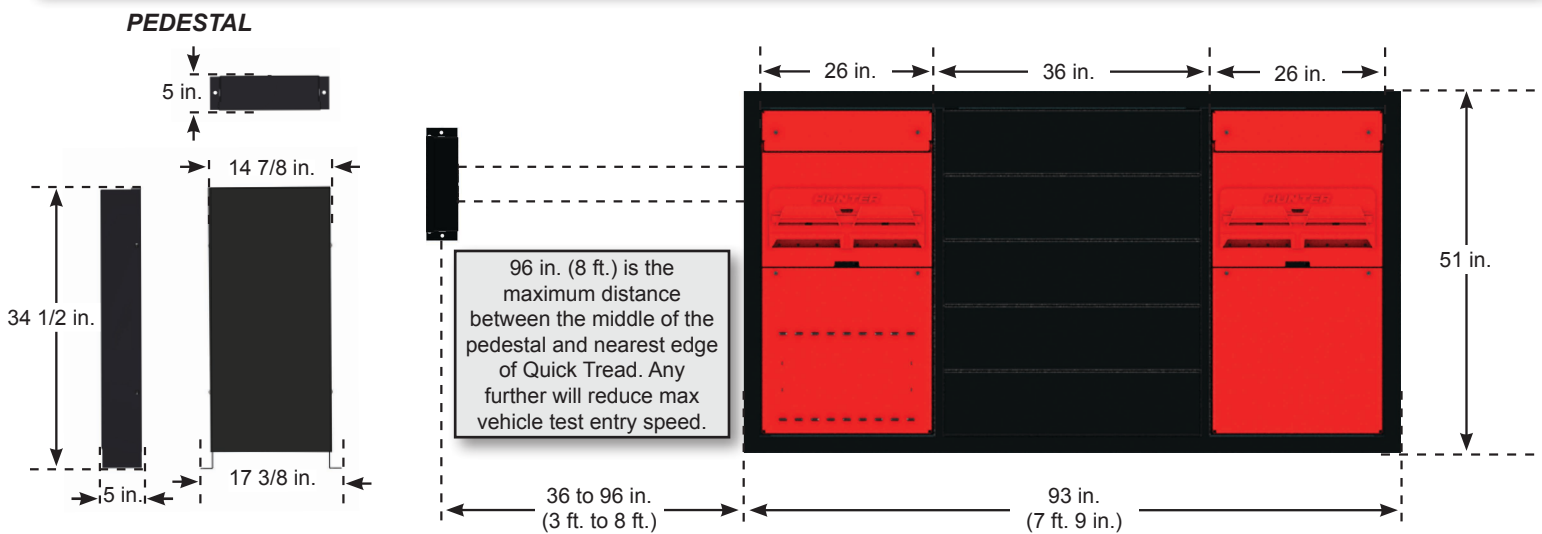

PIT & CONDUIT SPECIFICATIONS




QUICK TREAD:
HUNTER
SUPPLIED

SIDE VIEW



QUICK TREAD
SUB-STRUCTURE:
CONTRACTOR
SUPPLIED



Quick Tread's 3 in. (76 mm) underground conduit must be routed to the pedestal and console according to local codes. The pedestal can be placed on either side. Exact placement of conduit will vary. Refer to Form 6905-T.

