

TCX 50 E & A Series

Tire Changers


HUNTER
Engineering Company

SITE REQUIREMENTS



	TCX53		TCX51		TCX50	
	E (Electric)	A (Air)	E	A	E	A
Power/Air Motor Requirements	110V, 14A, 60Hz, 1ph, NEMA 5-15P OR 220V, 10A, 60Hz, 1ph, NEMA L6-20P	110-145 psi (8-10 bar) 14 CFM	110V, 14A, 60Hz, 1ph, NEMA 5-15P OR 220V, 10A, 60Hz, 1ph, NEMA L6-20P	110-145 psi (8-10 bar) 14 CFM	110V, 14A, 60Hz, 1ph, NEMA 5-15P OR 220V, 10A, 60Hz, 1ph, NEMA L6-20P	110-145 psi (8-10 bar) 14 CFM
Drive	10 rpm CW and CCW	~10 rpm CW and CCW	10 rpm CW and CCW	~10 rpm CW and CCW	10 rpm CW and CCW	~10 rpm CW and CCW
Air Supply Requirements	110-145 psi (8-10 bar)		110-145 psi (8-10 bar)		110-145 psi (8-10 bar)	
Shipping Weight	850 lbs (386 kg)		810 lbs (367 kg)		680 lbs (308 kg)	
Shipping Weight w/Wheel Lift	936 lbs (425 kg)		896 lbs (406 kg)		766 lbs (347 kg)	
Width (W)	52" (1,626mm)		52" (1,626 mm)		34" (914 mm)	
Height (H)	82" (2,082 mm)		82" (2,082 mm)		82" (2,082 mm)	
Depth (D)	47" (1,194 mm)*		47" (1,194 mm)*		47" (1,194 mm)*	

* Add 14 in. to depth for wheel lift

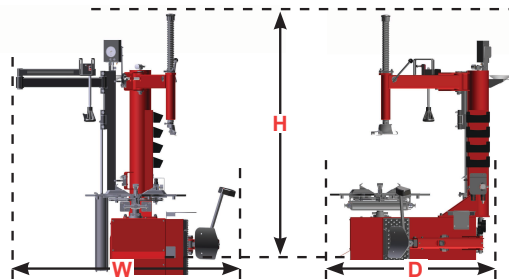

KEY SPECIFICATIONS

	TCX53	TCX51	TCX50
Mount / Demount Tool	Plastic Mount Head w/ protection OR Leverless Mount Head w / protection	Plastic Mount Head w/ protection OR Leverless Mount Head w / protection	Plastic Mount Head w/ protection
Clamping Type	Table Top	Table Top	Table Top
Bead Loosening Type	Side Shovel	Side Shovel	Side Shovel
Match Mounting Capable	No	No	No
Rim Diameter Range	10–26" External 12–28" Internal	10–26" External 12–28" Internal	10–26" External 12–28" Internal
Maximum Tire Diameter	46"	46"	46"
Maximum Wheel Width	14"	14"	14"

For tire changer information visit:
www.hunter.com/tire-changers

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form 6736-T, 06-18a
Supersedes Form 6736-T, 04-15
Copyright © 2013-2020, Hunter Engineering Company